




Product Type: Compact intermediate relay

## Product Name:RET-24DC-1C

Product Description: Compact industrial relay, 1transfer contact 24V DC/ 12A,Test button

### Product Size

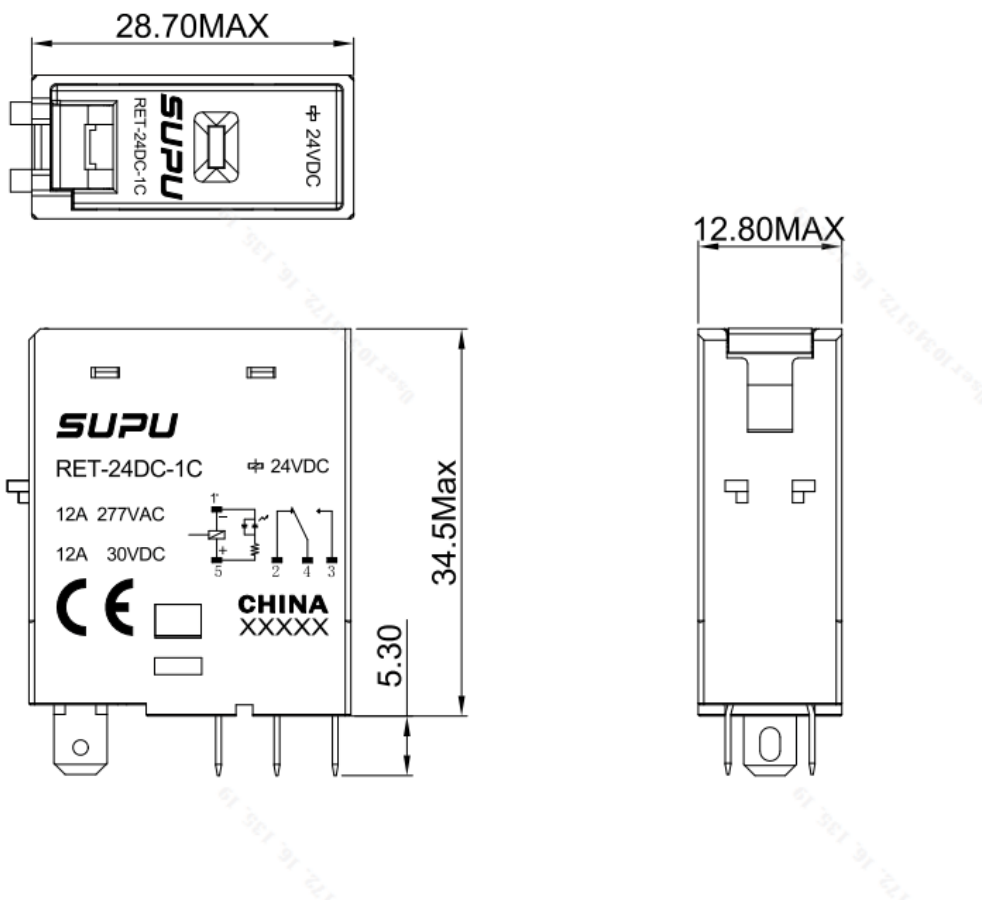

### Parameters

SUPU ID

RET-24DC-1C

Protection Level

IP40

<input type="checkbox"/> Ambient temperature (operation)	-25~+55°C
<input type="checkbox"/> Ambient temperature (storage)	-40~+70°C
<input type="checkbox"/> Mounting Type	optional
<input type="checkbox"/> Contact material	silver alloy
<input type="checkbox"/> Connection method	Push in connection
<input type="checkbox"/> Contact connection type	1C

## Technical data

<input type="checkbox"/> IEC Rated Voltage	24DC
<input type="checkbox"/> Overvoltage category	II
<input type="checkbox"/> Degree of pollution	2
<input type="checkbox"/> Insulation Resistance	1000MΩ (500VDC)
<input type="checkbox"/> Dielectric withstand voltage	5000VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 3000VAC 5min : BetweenContacts
<input type="checkbox"/> Endurance	Mechanical 20 million cycles or more Electrical over 100,000 cycles
<input type="checkbox"/> Operating voltage	≤75% of rated voltage
<input type="checkbox"/> Release Voltage	≥10% of rated voltage
<input type="checkbox"/> Maximum permissible voltage	130% of rated voltage
<input type="checkbox"/> Nominal power consumption	About0.53W
<input type="checkbox"/> Response time	15ms or less
<input type="checkbox"/> Release time	10ms or less
<input type="checkbox"/> Protective circuit	None
<input type="checkbox"/> Status display	visual
<input type="checkbox"/> Maximum switching power	3300VA/360W

<input type="checkbox"/> Rated load capacity	AC277V/12A DC30V/12A
--	----------------------

<input type="checkbox"/> Rated load current	12A
---	-----

## Commercial data

<input type="checkbox"/> Order No	RET-24DC-1C
-----------------------------------	-------------

<input type="checkbox"/> Packing unit	20
---------------------------------------	----

<input type="checkbox"/> Minimum order quantity	20
---	----

<input type="checkbox"/> Single piece weight	19g
--	-----

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

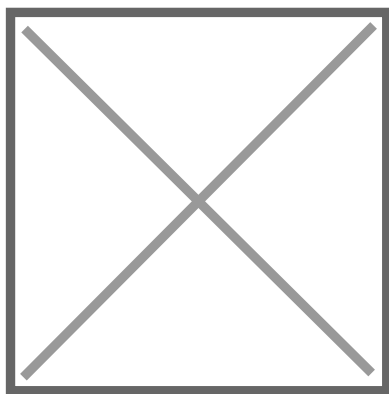

Wechat