




Product Type: Compact intermediate relay

Product Name:RET-24DC-2C

Product Description: Compact industrial relay, 2transfer contact 24VDC/ 8A,Test button

Product Size

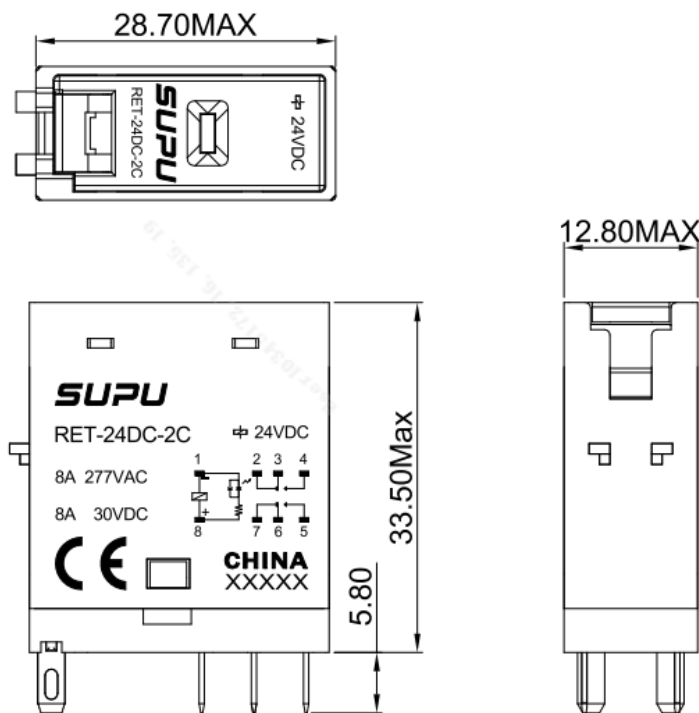

Parameters

<input checked="" type="checkbox"/> SUPU ID	RET-24DC-2C
<input checked="" type="checkbox"/> Protection Level	IP40
<input checked="" type="checkbox"/> Ambient temperature (operation)	-25~+55°C

<input type="checkbox"/> Ambient temperature (storage)	-40~+70°C
<input type="checkbox"/> Mounting Type	optional
<input type="checkbox"/> Contact material	silver alloy
<input type="checkbox"/> Connection method	Push in connection
<input type="checkbox"/> Contact connection type	2C

Technical data

<input type="checkbox"/> IEC Rated Voltage	24DC
<input type="checkbox"/> Overvoltage category	II
<input type="checkbox"/> Degree of pollution	2
<input type="checkbox"/> Insulation Resistance	1000MΩ (500VDC)
<input type="checkbox"/> Dielectric withstand voltage	5000VAC 1min : Coils/ contacts 1000VAC 1min : BetweenContacts 3000VAC 6min : BetweenContacts
<input type="checkbox"/> Endurance	Mechanical 20 million cycles or more Electrical over 100,000 cycles
<input type="checkbox"/> Operating voltage	≤75% of rated voltage
<input type="checkbox"/> Release Voltage	≥10% of rated voltage
<input type="checkbox"/> Maximum permissible voltage	130% of rated voltage
<input type="checkbox"/> Nominal power consumption	About0.53W
<input type="checkbox"/> Response time	15ms or less
<input type="checkbox"/> Release time	20ms or less
<input type="checkbox"/> Protective circuit	None
<input type="checkbox"/> Status display	visual
<input type="checkbox"/> Maximum switching power	2200VA/240W
<input type="checkbox"/> Rated load capacity	AC277V/8A DC30V/8A

Rated load current

8A

Commercial data

Order No

RET-24DC-2C

Packing unit

20

Minimum order quantity

20

Single piece weight

19g

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail: supucontact@supu.cn

Service Hotline: 400-626-6336

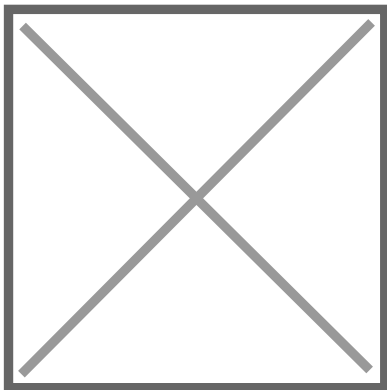

Wechat