


Product Type: Push-in spring terminal

Product Name:TPT2.5-2-PV

Product Description: Connection method:Push in connection,IEC Rated Current:20A,IEC Rated Voltage:500V,Number of connections:6,Number of levels : 3,Rated cross section:26-12AWG

Product Size

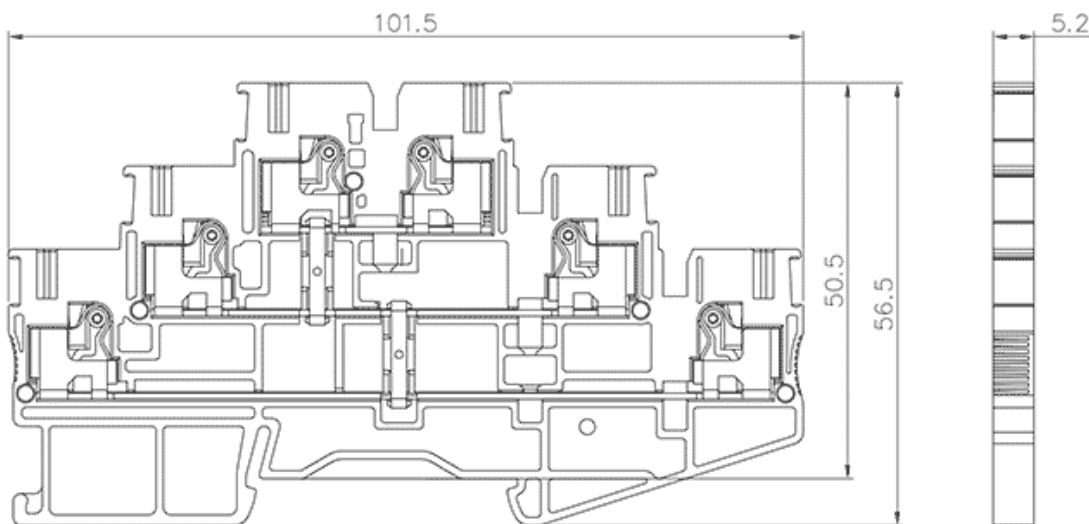

Parameters

<input checked="" type="checkbox"/> SUPU ID	TPT2.5-2-PV
<input checked="" type="checkbox"/> Width	5.2mm
<input checked="" type="checkbox"/> Number of levels	3
<input checked="" type="checkbox"/> Number of connections	6

<input type="checkbox"/> Connection method	直插弹簧接线
<input type="checkbox"/> Protection Level	IP20
<input type="checkbox"/> Insulation material	PA66
<input type="checkbox"/> Insulation material group	I
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Sn,Plated
<input type="checkbox"/> Ambient temperature (operation)	-40°C~105°C
<input type="checkbox"/> Ambient temperature (assembly)	-5°C~70°C
<input type="checkbox"/> Ambient temperature (storage)	-25°C~60°C
<input type="checkbox"/> Permissible humidity (storage/transport)	30%~70%

Technical data

<input type="checkbox"/> IEC Rated Current	20A
<input type="checkbox"/> IEC Rated Voltage	500V
<input type="checkbox"/> Overvoltage category	III
<input type="checkbox"/> Degree of pollution	3
<input type="checkbox"/> Rated impulse voltage	6KV
<input type="checkbox"/> UL Rated Current	20A
<input type="checkbox"/> UL Rated Voltage	300V
<input type="checkbox"/> Conductor cross section rigid	0.2-4mm ²
<input type="checkbox"/> Conductor cross section flexible	0.2-2.5mm ²
<input type="checkbox"/> Conductor cross section flexible,with ferrule	0.2-2.5mm ²
<input type="checkbox"/> Stripping length	8-10mm
<input type="checkbox"/> Use group	B/C

Commercial data

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

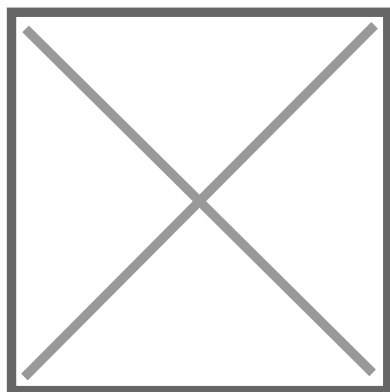

Wechat