




Product Type: Plug-in terminal-socket

Product Name:MC-PA7.5H15-F-0002

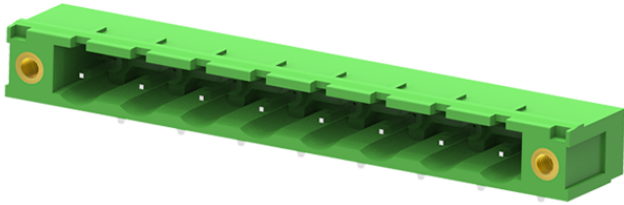

Product Description: Pitch: 7.5mm Rated Voltage : 630V Rated Current: 18A colour : customizable

### Product Size



### Parameters

|   |                    |
|---|--------------------|
| <input checked="" type="checkbox"/> SUPU ID               | MC-PA7.5H15-F-0002 |
| <input checked="" type="checkbox"/> Pitch                 | 7.5                |
| <input checked="" type="checkbox"/> Number of levels      | Single layer       |
| <input checked="" type="checkbox"/> Number of connections | 15                 |

|  |                                  |
|--|----------------------------------|
| <input type="checkbox"/> Connection method           | -                                |
| <input type="checkbox"/> Protection Level            | IP20                             |
| <input type="checkbox"/> Operating temperature range | -40~+105°C                       |
| <input type="checkbox"/> Insulation material         | PA66                             |
| <input type="checkbox"/> Insulation material group   | I                                |
| <input type="checkbox"/> Contact material            | Copper alloy                     |
| <input type="checkbox"/> Contact plating             | Sn,Plated                        |
| <input type="checkbox"/> Color                       | Green/Black/Blue/Grey/Orange/Red |

## Technical data

|  |                   |
|--|-------------------|
| <input type="checkbox"/> IEC Rated Current                             | 630V              |
| <input type="checkbox"/> IEC Rated Voltage                             | 18A               |
| <input type="checkbox"/> Overvoltage category                          | III III II        |
| <input type="checkbox"/> Degree of pollution                           | 3 2 2             |
| <input type="checkbox"/> Rated impulse voltage                         | 6.0KV 6.0KV 6.0KV |
| <input type="checkbox"/> UL Rated Current                              | 15A - 10A         |
| <input type="checkbox"/> UL Rated Voltage                              | 300V - 300V       |
| <input type="checkbox"/> Conductor cross section rigid                 | -                 |
| <input type="checkbox"/> Conductor cross section flexible              | -                 |
| <input type="checkbox"/> Conductor cross section flexible,with ferrule | -                 |
| <input type="checkbox"/> Locking screw Specification                   | -                 |
| <input type="checkbox"/> Locking screw torque                          | -                 |
| <input type="checkbox"/> Fixed Screw Specification                     | -                 |
| <input type="checkbox"/> 固定螺钉扭矩  | -                 |

|  |       |
|--|-------|
| <input type="checkbox"/> Stripping length    | -     |
| <input type="checkbox"/> Use group           | B/C/D |
| <input type="checkbox"/> Rated cross section | -     |

## Commercial data

|                                   |                    |
|-----------------------------------|--------------------|
| <input type="checkbox"/> Order No | MC-PA7.5H15-F-0002 |
|-----------------------------------|--------------------|

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China


Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

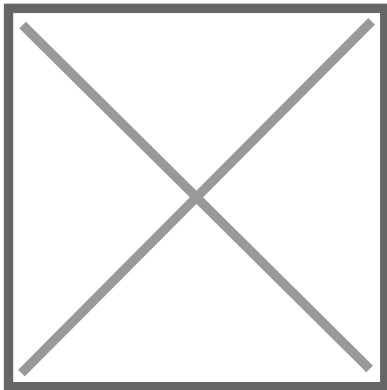

Wechat