


Product Type: Plug-in terminal-Plug

Product Name:MC-RJ3.81H08P-K-0001

Product Description: Pitch:3.81mm Rated Voltage : 160V Rated Current:8A Connection method : Push-in spring connection colour : customizable

Product Size

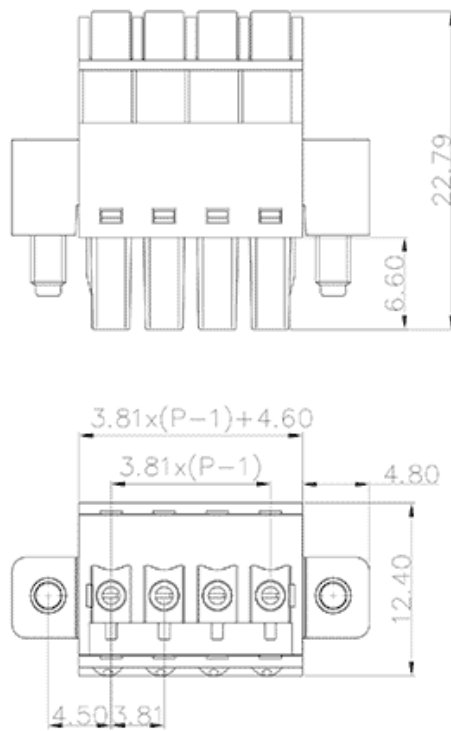

Parameters

| | |
|---|----------------------|
| <input checked="" type="checkbox"/> SUPU ID | MC-RJ3.81H08P-K-0001 |
| <input checked="" type="checkbox"/> Pitch | 3.81 |
| <input checked="" type="checkbox"/> Number of levels | single layer |
| <input checked="" type="checkbox"/> Number of connections | 8 |

| | |
|---|----------------------------------|
| <input checked="" type="checkbox"/> Connection method | Push in connection |
| <input checked="" type="checkbox"/> Protection Level | IP20 |
| <input checked="" type="checkbox"/> Operating temperature range | -40~+105°C |
| <input checked="" type="checkbox"/> Insulation material | PA66 |
| <input checked="" type="checkbox"/> Insulation material group | I |
| <input checked="" type="checkbox"/> Contact material | Copper alloy |
| <input checked="" type="checkbox"/> Contact plating | Sn,Plated |
| <input checked="" type="checkbox"/> Color | Green/Black/Blue/Grey/Orange/Red |

Technical data

| | |
|---|------------------------|
| <input checked="" type="checkbox"/> IEC Rated Current | 8A |
| <input checked="" type="checkbox"/> IEC Rated Voltage | 160V |
| <input checked="" type="checkbox"/> Overvoltage category | III/III/ II |
| <input checked="" type="checkbox"/> Degree of pollution | 3 2 2 |
| <input checked="" type="checkbox"/> Rated impulse voltage | 2.5KV 2.5KV2.5KV |
| <input checked="" type="checkbox"/> UL Rated Current | 8A - 8A |
| <input checked="" type="checkbox"/> UL Rated Voltage | 300V - 300V |
| <input checked="" type="checkbox"/> Conductor cross section rigid | 0.2-1.5mm ² |
| <input checked="" type="checkbox"/> Conductor cross section flexible | 0.2-1.5mm ² |
| <input checked="" type="checkbox"/> Conductor cross section flexible,with ferrule | 0.2-1.5mm ² |
| <input checked="" type="checkbox"/> Locking screw Specification | - |
| <input checked="" type="checkbox"/> Locking screw torque | - |
| <input checked="" type="checkbox"/> Fixed Screw Specification | M2.5 |
| <input checked="" type="checkbox"/> 固定螺钉扭矩 | 0.3N.m |

| | |
|--|----------|
| <input type="checkbox"/> Stripping length | 8-9mm |
| <input type="checkbox"/> Use group | B/C/D |
| <input type="checkbox"/> Rated cross section | 24~16AWG |

Commercial data

| | |
|-----------------------------------|----------------------|
| <input type="checkbox"/> Order No | MC-RJ3.81H08P-K-0001 |
|-----------------------------------|----------------------|

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat