


Product Type: Plug-in terminal-Plug

Product Name:MC-RQ7.62H13P-K-0001

Product Description: Pitch:7.62mm Rated Voltage : 1000V Rated Current:41A Connection method : Push in connection colour : customizable

### Product Size

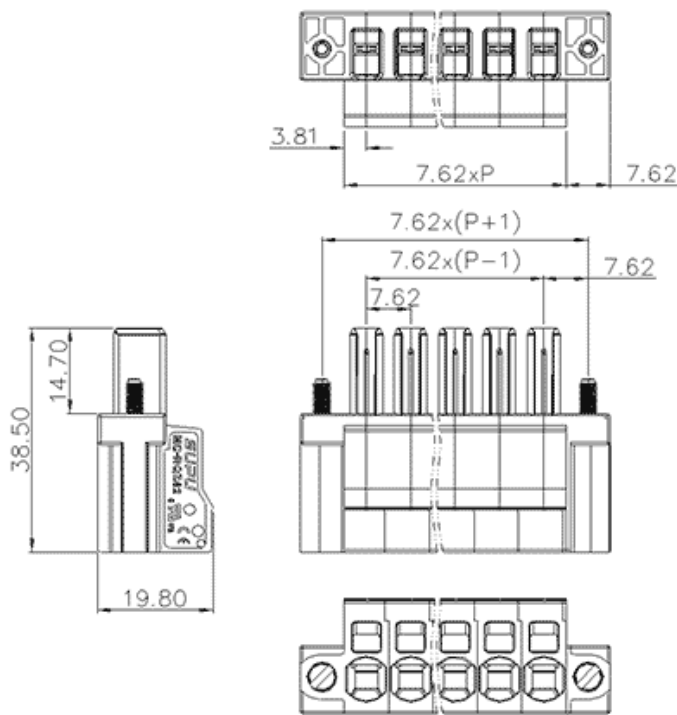

### Parameters

<input checked="" type="checkbox"/> SUPU ID	MC-RQ7.62H13P-K-0001
<input checked="" type="checkbox"/> Pitch	7.62
<input checked="" type="checkbox"/> Number of levels	single layer
<input checked="" type="checkbox"/> Number of connections	13

<input type="checkbox"/> Connection method	Push in connection
<input type="checkbox"/> Protection Level	IP20
<input type="checkbox"/> Operating temperature range	-40~+105°C
<input type="checkbox"/> Insulation material	PPA
<input type="checkbox"/> Insulation material group	I
<input type="checkbox"/> Contact material	Copper alloy
<input type="checkbox"/> Contact plating	Sn,Plated
<input type="checkbox"/> Color	Green/Black/Blue/Grey/Orange/Red

## Technical data

<input type="checkbox"/> IEC Rated Current	41A
<input type="checkbox"/> IEC Rated Voltage	1000V
<input type="checkbox"/> Overvoltage category	III/III/ II
<input type="checkbox"/> Degree of pollution	3 2 2
<input type="checkbox"/> Rated impulse voltage	8.0KV8.0KV8.0KV
<input type="checkbox"/> UL Rated Current	35A 35A -
<input type="checkbox"/> UL Rated Voltage	600V 600V -
<input type="checkbox"/> Conductor cross section rigid	0.2-10mm <sup>2</sup>
<input type="checkbox"/> Conductor cross section flexible	0.2-6mm <sup>2</sup>
<input type="checkbox"/> Conductor cross section flexible,with ferrule	0.2-6mm <sup>2</sup>
<input type="checkbox"/> Locking screw Specification	-
<input type="checkbox"/> Locking screw torque	-
<input type="checkbox"/> Fixed Screw Specification	M3
<input type="checkbox"/> 固定螺钉扭矩	0.5N.m

<input type="checkbox"/> Stripping length	13-15mm
<input type="checkbox"/> Use group	B/C/D
<input type="checkbox"/> Rated cross section	24~8AWG

## Commercial data

<input type="checkbox"/> Order No	MC-RQ7.62H13P-K-0001
-----------------------------------	----------------------

### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat